


CERAMIC CONTAINMENT SHELLS OPTIMIZE MAGNETIC DRIVE PUMPS

- Non-magnetic component, no eddy currents
- High energy efficiency compared to other materials
- Corrosion resistance against most aggressive chemicals
- High mechanical strength at high temperatures


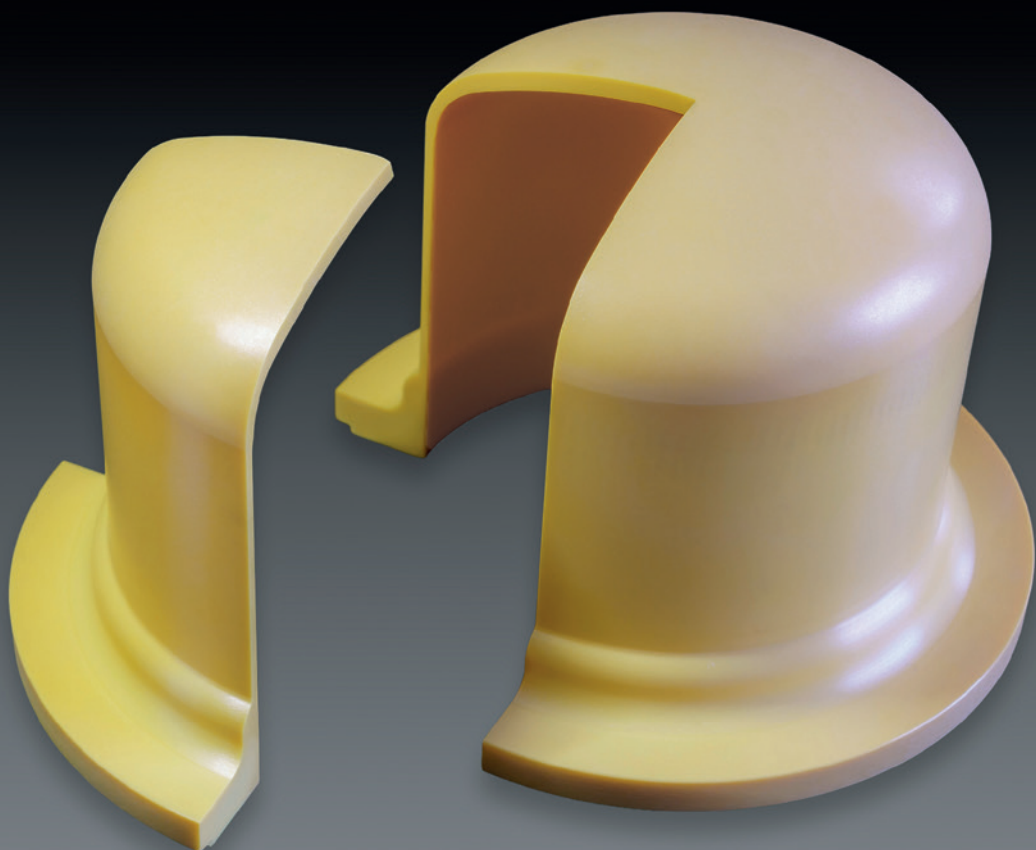


CONTAINMENT SHELLS ZIRCONIA M

ONE MATERIAL FOR MOST REQUIREMENTS

Rauschert containment shells for magnetic drive pumps are made of Rauschert Zirconia M, a high performance ceramic with the following advantages:

- ✓ **High power transfer** – Non-magnetic, non-electrically conductive material reduces drive power requirements up to 15%
- ✓ **High mechanical strength up to 450°C (842°F)** – Test pressure up to 90 bar (1300 psi) possible depending on containment shell design
- ✓ **High thermal shock resistance** – Resistant to sudden increases or decreases in temperature
- ✓ **Extreme chemical resistance** – Allows long-term use of pump with aggressive media. Various coatings available
- ✓ **Leakfree and environmentally-friendly coupling** – No connection between pump and drive ensures no release of corrosive or toxic fluid or gases into environment
- ✓ **Thermal expansion** – Zirconia M has a thermal expansion similar to steel, making it well-suited for integration and comparison with steel in pumps

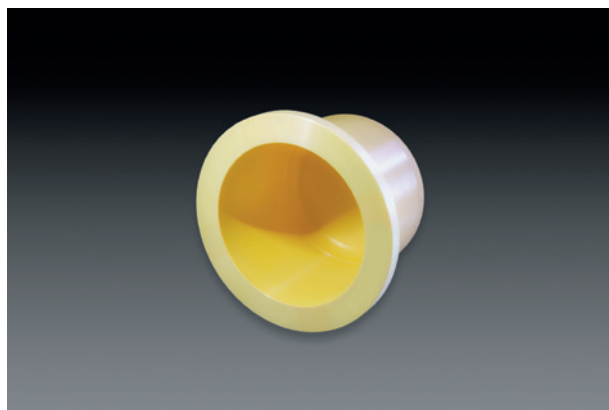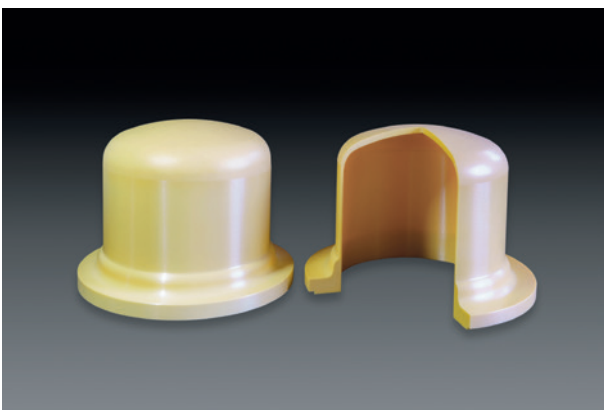

DO YOU HAVE A CHALLENGE?
YOUR CHALLENGE IS OUR DRIVE – GET IN TOUCH NOW TO FIND A SOLUTION

Rauschert Heinersdorf-Pressig GmbH
Bahnhofstr. 1 | 96332 Pressig | Germany
T: +49 9265 78-0
E: engineering-ceramics@rauschert-tec.com
www.rauschert-tec.com

